

Taking Control ...To A

HIGHER LEVEL

INSIDE THIS ISSUE:


<i>Designed to Keep on Working...and Working</i>	2
<i>Capacitance 101 Cont.</i>	2
<i>Better Solutions</i>	3
<i>New High Temp. Probe</i>	3
<i>Point You In The Right Direction</i>	4

“BinMaster will provide the most thorough and exact solutions to the challenges and opportunities presented by the customers we serve.”

Capacitance 101: Understanding the Industry’s Most Versatile Point Level Control

Capacitance probes function like big capacitors. A capacitor is an electrical device formed by two conductors and separated by an insulator. The two conductors are represented by the active portion of the probe, and the wall of the metal vessel. The probe energizes the conductors and measures the capacitance that exist between them. The amount of capacitance depends upon the size of the conductors, the physical space between the conductors, and the dielectric of the material between them. The dielectric constant of a material is a unitless number, derived from the ratio of the amount of capacitance produce when it is present, compared to the amount produced when only air is present.

Capacitance is expressed in units called farads. For our purpose, a farad is much to large. We talk in terms of picofarads. A picofarad is one-trillionth of a farad. When material makes contact with the probe, the capacitance between the two conductors changes. The unit

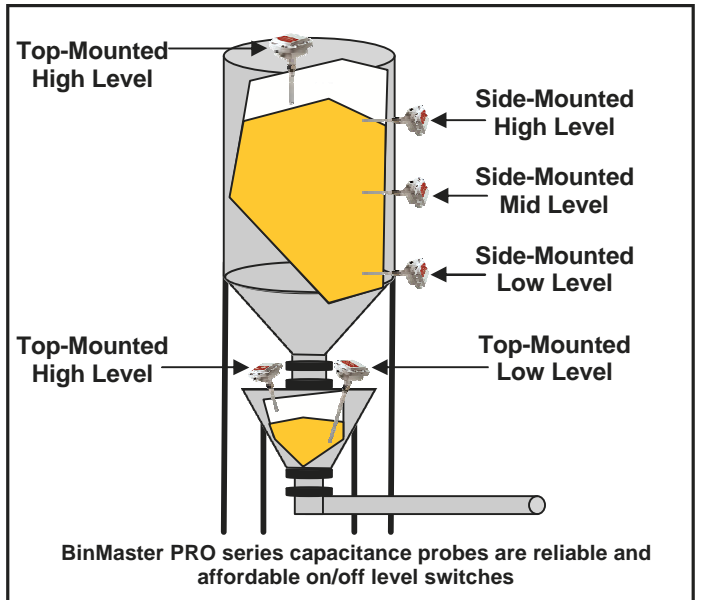

perceives that change and sends a relay signal to signify the presence or absence of material. BinMaster capacitance probes use fail-safe relays; so if the unit loses power, the relays fall to the “safe” condition and send a signal indicating an alarm condition.

Conductive materials that leave a residue once they have fallen away require a coated or sleeved probe. This non-conductive coating keeps the

conductive material from grounding the probe to the vessel wall. Any conductive residue that builds up from vessel wall to the active portion of an uncoated probe will short out the two conductors. It would be like pressing the two conductors right up next to each other, making it impossible to sense anything between them.

Continued on page 2

- Point Level Sensors
- Inventory Measurement
- Flow Detection
- Dust Detection
- Aeration & Vibration



Designed To Keep On Working and Working..

Grains

Cement

Coal

Oils

Water

Aggregates



Fly Ash

Plastic

Feed

Chemicals

Seeds

Pharmaceuticals

Food Ingredients

BINMASTER PRO I Capacitance Probe


- ✓ "Quick Set" Calibration with two single turn potentiometers performed without material present, takes less than 20 seconds to perform.
- ✓ Operates at a low frequency of 6 KHz, below the RF range and will not interfere with or be interfered by other nearby electronic equipment.
- ✓ Unsurpassed static protection:
 1. Static drain.
 2. Gas discharge tube not allowing voltage to rise above a certain level.
 3. By-pass capacitance on input passes false impulses to ground.
 4. Current limiting resistance on probe
- ✓ Standard probe includes 1 1/4" and 3/4" NPT mount.
- ✓ "PRO Shield" protects against false readings because of coating or build up.
- ✓ A stronger more durable probe constructed of 5/8" diameter 316 S.S.
- ✓ Standard abrasion resistant Delrin or Teflon insulated probe sleeve allows the same unit to be used in solids, powders, slurries, or liquids. One size fits all.
- ✓ Extremely sensitive probes can sense material with a capacitance of 1/2 picofarad above air.

BinMaster PRO Series capacitance probes use advanced integrated circuit technology operating at low frequency to achieve both high sensitivity and stable calibration. The probe uses a simple timing technique that compares the discharge time of the probe capacitance to that of a reference capacitance. The probes outstanding stability results from several factors. (1) A single integrated circuit makes the critical timing comparison. Temperature variations have an equal effect on the timing of both the probe and reference and, therefore, cancel. (2) The time interval at which the discharge comparison is repeated is not involved in the sensing process, making calibration independent of oscillator

frequency and stability. (3) Both the probe and the reference capacitance discharge are from a common voltage level. This makes calibration insensitive to power supply voltage variations. (4) Equal internal capacitance in both the probe and reference circuitry make any temperature dependent changes to these components values cancel. In addition, these internal capacitors have zero temperature coefficients and are physically located together to assure they are at equal temperatures.

Calibration stability, along with, static discharge survival, and RF immunity are three of the main reasons why BinMaster probes outperform the competition.

Capacitance 101 Continued..




PRO-Shield—Ignores Buildup

The probe examines a large area around itself, not just the area immediately surrounding it. This allows the probe to ignore build-up which can occur on the probe assembly. This also allows us to use a sleeved probe. When you calibrate the probe, you are setting it above the dielectric constant of the ambient environment (air), and below the dielectric constant of your material. The dielectric constant of air is 1. The BinMaster


capacitance probes can sense material with a capacitance of 1/2 picofarad above air.

A PRO-Shield on the BinMaster probes is designed to overcome problems resulting from sidewall build-up, or bridging between the sidewall and probe. A shield is an energized portion of the probe not used for sensing material. The first five inches of the shaft as it extends out from the enclosure make up the shield (see diagram).


We Offer Better Solutions When Choosing Level Controls




A **Standard Shielded** Delron/Teflon sleeved probe is our most versatile all-purpose probe. It works reliable in solids, powders, slurries, and liquids. It has a rugged 5/8" dia. 316 S.S. probe featuring "PRO-Shield" protecting against false readings due to coating or buildup.




B **Lagged Probes** are used to extend the probe up to 2 ft. through thick walled hoppers and bins. It can also be used to lag the electronics away from the heat source or to clear insulation. Optional in/out lag also available.




C **Flush Mounted** probe mounts flush on a vessel wall, conveyer housing or chute. No probe intrusion designed for space constraint areas or applications where material flow or bridging may damage standard probes. A bin wall adaptor is available for thick walls.



D **Stubby Shielded** probe is designed with a 6.5" overall length while still giving you the PRO-Shield protection. Great for low level applications where minimal projection is preferred due to restricted area or excessive weight that could damage longer probes.



E **Hanging Flexible Extension** probe is designed for high, mid, and low level detection when it is necessary to top mount. The flexible extension is also used in aggregate, coal or other lump materials that might damage a rigid probe. Maximum length 35 feet.

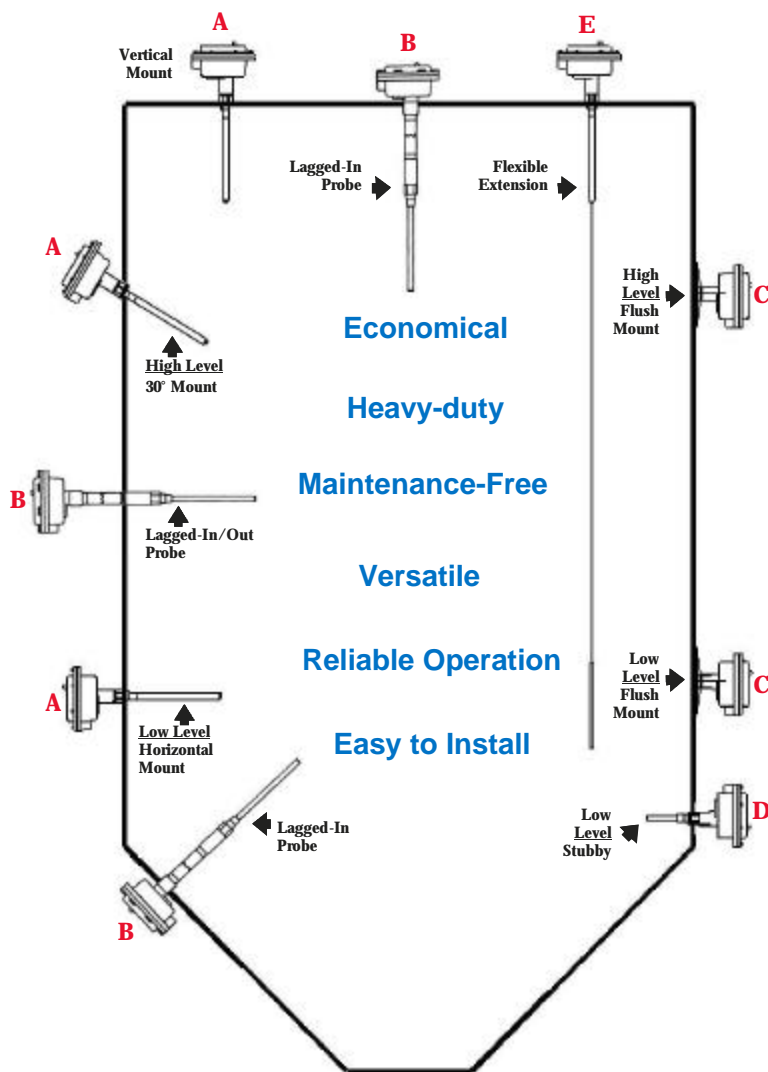


* Additional probe options available

New Rugged High Temperature Capacitance Probe

Introducing BinMaster's new high temperature PRO Remote 20 capacitance probe. This heavy duty probe is designed for applications that exceed 500° F (260° C). Provides protection as probe is Stainless Steel with Ceramic inserts and electronics are mounted remote up to 20 feet from the probe.


- Process Temp.:** 1000° F (600° C)
- Vessel Pressure:** 100 psi
- Insertion Length:** 9 inches (230 mm)
- Mounting:** Side or Top
- Process Connection:** 1 1/4" NPT
- Electronics:** Remote
- Rating:** NEMA 4X, 5 & 12
- PRO-Shield:** Compensates for Material Build-Up

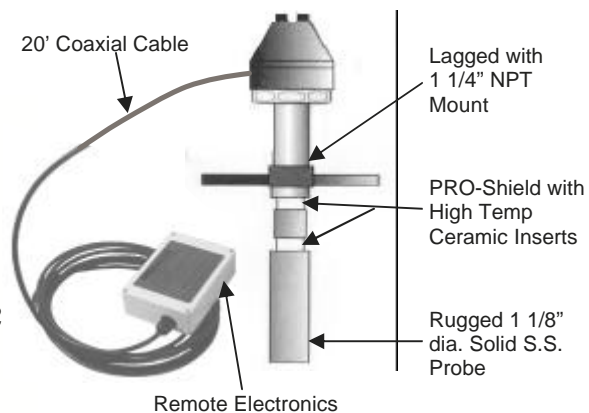

WE CAN POINT 
YOU IN THE RIGHT
DIRECTION

BINMASTER

Taking Control...To A Higher Level

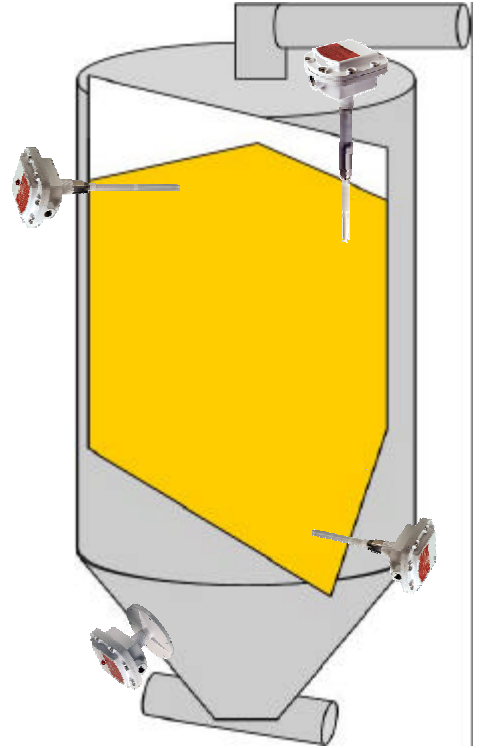

WE'RE ON THE WEB
WWW.BINMASTER.COM

(800) 278-4241
(402) 434-9101
FAX: (402) 434-9133

P.O. BOX 29709
LINCOLN, NE 68529

Taking Control...To A Higher Level
BINMASTER